

# Tumble dryer

## T5130, T5130C

### Features and benefits

- **Compass Pro® microprocessor offers:**
  - Large display and one control knob for easy program selection
  - Language selection
  - Quick start and option buttons for frequently used programs
  - Drying program packages optimized for Economy, Care and Time
  - Service program for adjustment of parameters
  - USB connection
- Residual Moisture Control for an accurate drying result and a low energy consumption
- Reversing drum for less tangling of large items
- Stainless steel drum
- Reversible door hanging for a convenient laundry flow
- Easy access to vital parts from the top and rear for simple servicing
- The coin version with Ecopower to avoid over drying of the garments and get a lower energy consumption
- T5130C: For optimal performance the room temperature should not exceed 25° Celcius



Images shown are a representation of the product only and variations may occur.

### Main options

- Stainless steel front
- Connection to booking- /payment- system or coin meter
- Stacking frame for mounting T5130 on top of W555H
- Stainless steel base frame
- Integrated condense system

| Main specifications               |                     |       | T5130     | T5130C |
|-----------------------------------|---------------------|-------|-----------|--------|
| Rated capacity,                   | filling factor 1:22 | kg/lb | 6/13      | 6/13   |
| Drum volume                       |                     | litre | 130       | 130    |
| Drum diameter                     |                     | mm    | 575       | 575    |
| Heating alternatives              |                     |       |           |        |
| electric                          |                     | kW    | 5.1 / 3.2 | 3.0    |
| <b>Consumption data*</b>          |                     |       |           |        |
| Total time full load              |                     | min   | 32        | 55     |
| Energy consumption full load      |                     | kWh   | 2.78      | 2.96   |
| Evaporation                       |                     | g/min | 92.8      | 48     |
| Energy kWh/litre water evaporated |                     | kWh/l | 0.94      | 1.00   |

\* At rated capacity 100% cotton load at 50% initial moisture dried to 0%.


| Electrical connections* |               |       |                  |                |                    |
|-------------------------|---------------|-------|------------------|----------------|--------------------|
| Heating alternative     | Main voltage  |       | Heating power kW | Total power kW | Recommended fuse A |
|                         |               | Hz    |                  |                |                    |
| Electric heated T5130   | 220-230V 1 -  | 50/60 | 3.1              | 3.3            | 16                 |
|                         | 240V 1 -      | 50/60 | 3.2              | 3.5            | 16                 |
|                         | 220-230V 3 -  | 50/60 | 3.1              | 3.3            | 16                 |
|                         | 240V 3 -      | 50/60 | 3.2              | 3.5            | 16                 |
|                         | 220-230V 3 -  | 50/60 | 4.9              | 5.1            | 16                 |
|                         | 240V 3 -      | 50/60 | 5.1              | 5.4            | 16                 |
|                         | 380-400V 3 -  | 50/60 | 4.9              | 5.1            | 10                 |
|                         | 415V 3 -      | 50/60 | 5.1              | 5.3            | 10                 |
|                         | 440V 3 -      | 60    | 5.1              | 5.4            | 10                 |
|                         | 480V 3 -      | 60    | 5.1              | 5.3            | 10                 |
| T5130C                  | 380-400V 3N - | 50/60 | 4.9              | 5.1            | 10                 |
|                         | 440V 3 -      | 60    | 3.0              | 3.4            | 10                 |
|                         | 380-400V 3N - | 50/60 | 3.0              | 3.3            | 10                 |
|                         | 220-230V 3 -  | 50/60 | 2.9              | 3.3            | 10                 |

| Connections                                       |                           | T5130      | T5130C     |
|---|---------------------------|------------|------------|
| Air outlet  | mm                        | ∅ 100      | -          |
| Maximum air flow                                  | m <sup>3</sup> /h         | 240        | -          |
| Condensate  |                           | -          | 1/2"       |
| Maximum static back pressure                      | Pa                        | 80         | -          |
| Sound levels                                      |                           |            |            |
| Airborne sound level                              | dB(A)                     | <70        | <70        |
| Heat emission                                     |                           |            |            |
| % of installed power, max                         |                           | 15         | 15         |
| Shipping data**                                   |                           |            |            |
| Shipping volume                                   | net, kg<br>m <sup>3</sup> | 58<br>0.51 | 57<br>0.63 |
| Accessories                                       |                           |            |            |
| Stacking frame for mounting T5130 on top of W555H |                           | x          | x          |
| Stainless steel base frame                        |                           | x          | x          |
| Dimensions in mm                                  |                           |            |            |
| A Width   |                           | 597        | 597        |
| B Depth   |                           | 725        | 725        |
| C Height  |                           | 839        | 839        |
| D   |                           | 138        | 138        |
| E   |                           | 50         | 50         |
| F   |                           | 89         | 89         |
| G   |                           | 200        | 200        |


1 Operating panel  
 2 Door opening ∅ 370 mm  
 3 Electrical connection  
 4 Exhaust connection  
 5 Condense connection

\* Other voltages available, see installation manual.


\*\* Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

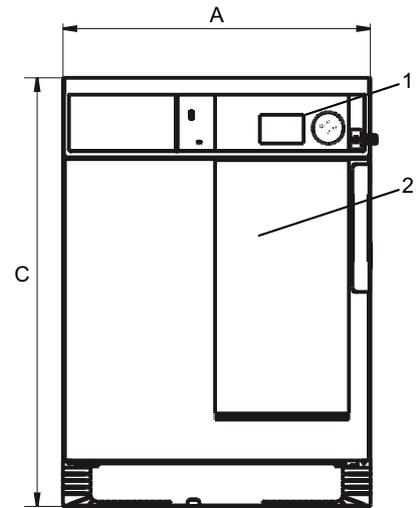

Front

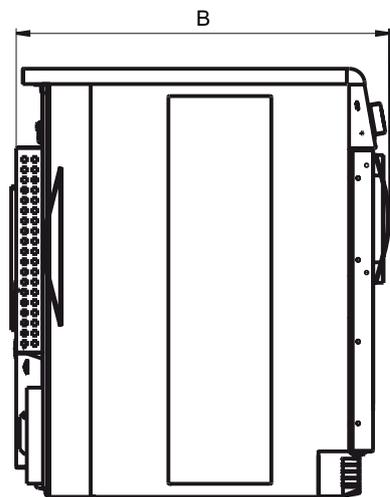

Left side

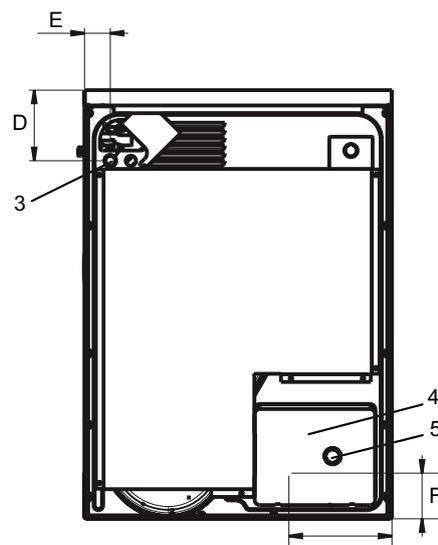

Rear side