

Tumble dryer

T5675

Features and benefits

- Axial airflow and tight construction gives low energy consumption
- High productivity - 2 full loads per hour
- Large door opening for easy loading and unloading
- Easy and ergonomic access to the lint screen
- Excellent water evaporation efficiency per kWh
- The coin version with Ecopower to avoid over drying of the garments and get a lower energy consumption
- With Compass Pro program control
 - Large and clear display with control knob for easy program selection
 - Easy access with user-friendly interface
 - Language selection
 - Drying program packages optimized for Economy, Care and Time
 - Service program for adjustment of parameters
 - USB connection

Main options

- Stainless steel front
- Stainless steel drum
- Residual Moisture Control - RMC
- Connection to booking- /payment- system or coin meter
- Reversing drum
- Emergency stop button
- Supply disconnecter

Accessories

- Fresh air intake
- Exhaust on top
- Insert for drying special equipment




Images shown are a representation of the product only and variations may occur.

Main specifications				T5675			
Rated capacity,	filling factor 1:18	kg/lb		37.5/82.7			
	filling factor 1:22	kg/lb		30.6/67.5			
Drum volume		litre		675			
Drum diameter		mm		913			
Heating alternatives							
	electric	kW		32/40			
	gas	BTU/h (kW)		14 3400 (42)			
	steam at 600-700 kPa	kW		46			
Consumption data*				32 kW	40 kW	Gas	Steam
Total time at 30.6 kg		min		28	23	23	22
Energy consumption at 30.6 kg		kWh		15.10	15.08	16.42	19.27
Evaporation		g/min		544	676	653	700
Energy kWh/litre water evaporated		kWh/l		0.98	0.98	1.07	1.26


* At rated capacity 100% cotton load at 50% initial moisture dried to 0%.

Electrical connections*					
Heating alternative	Main voltage		Heating power kW	Total power kW	Recommended fuse A
		Hz			
Electric heated	220-240V 3 ~	50/60	32.0/40.0	34.4/42.4	100/125
	380-415V 3 ~	50/60	32.0/40.0	24.5/42.5	50/63
Gas heated / Steam heated	220-240V 1 ~	50/60	-	2.0	10
	220-240V 3 ~	50/60	-	2.4	10
	380-415V 3 ~	50/60	-	2.5	10


Steam, gas and air connections			T5675
Steam	ISO 7/1-R		1"
Steam pressure		kPa	100-1000
Steam consumption		kg/h	65
Condensate	ISO 7/1-R		1"
Gas	NG/PG	ISO 7/1-R	1/2"
Gas pressure	Natural gas	Pa	2000
		mbar	20
	Propane	Pa	2800-3700
		mbar	28-37
Air outlet		Ø mm	200
Maximum air flow:			
	Electric 50 Hz / 60 Hz	m³/h	1140 / 1140
	Gas 50 Hz / 60 Hz	m³/h	1140 / 1140
	Steam 50 Hz / 60 Hz	m³/h	1380 / 1380
Maximum static back pressure:			
	Electric 50 Hz / 60 Hz	Pa	270 / 800
	Gas 50 Hz / 60 Hz	Pa	410 / 800
	Steam 50 Hz / 60 Hz	Pa	900 / 1100
Sound levels			
Airborne sound level		dB(A)	<70
Heat emission			
% of installed power, max			15
Shipping data**			
Shipping volume	net, kg		283
	crated, m³		3.25
Dimensions in mm			
A	Width		961
B(a)	Depth		1560
B(b)	Depth		1640
C	Height		1857
D			660
E			720
F			170
G			1490
H			200
I			180
J			1560
K			50
L			480
M			580
N			805
1 Control panel 2 Door opening Ø 810 mm 3 Electrical connection 4 Gas connection 5 Exhaust connection 6 Condensate connection 7 Steam connection 8 Lint screen			

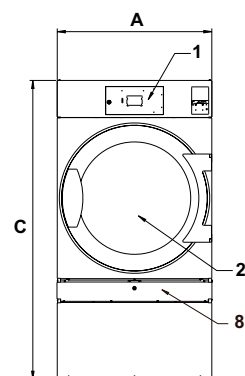

Front

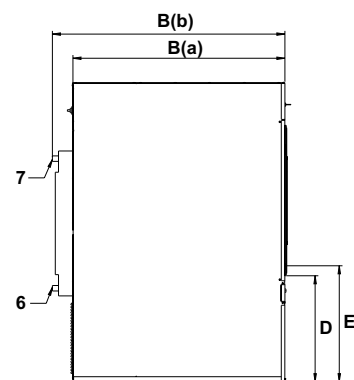

Left side

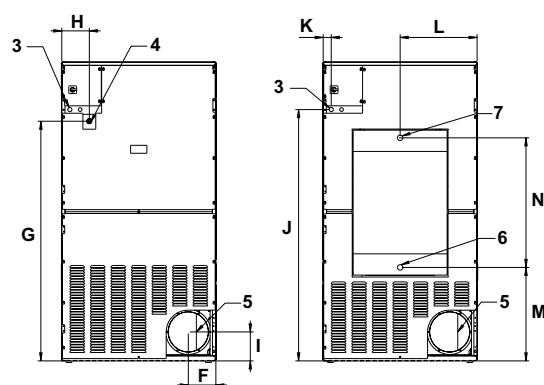

EL, gas

Steam

Rear side

* Other voltages available, see installation manual.

** Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.